




Data Sheet

Wall-Mounted (42")

KRP-AS-42ex-WM-FO-T (RP3)

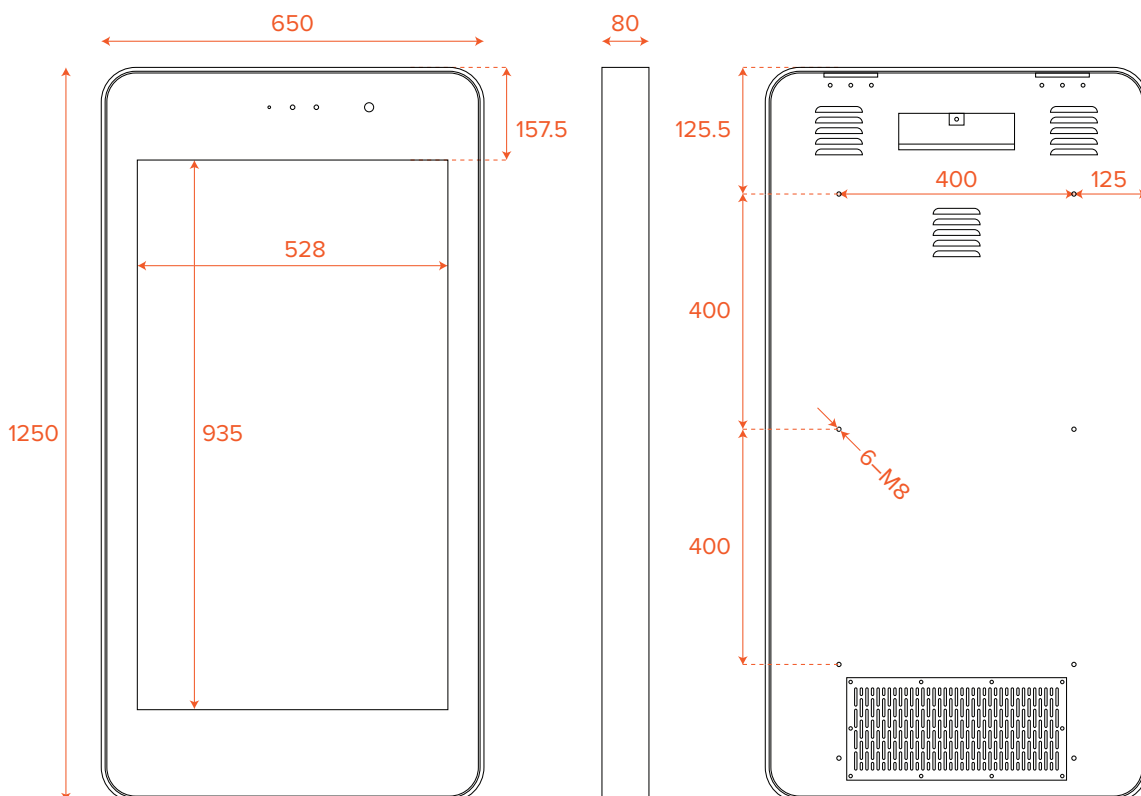

Features

- Bright active matrix TFT LCD display
- Anti-reflective / anti-glare coating
- Internal media player housing
- Internal power output for power feed to media player
- Built-in option to add external WiFi aerial antenna
- Remote control support for full OSD features
- Three year parts warranty

Hardware

LCD panel	Active Matrix TFT-LCD Display
Active Area	930.24(H) x 523.26(V) mm, 42 inch
Resolution	1920 x 1080
Pixel Pitch	0.1615(H) x 0.4845(V)mm
Color	8 bits 16.7m color
Interface	VGA, HDMI
Viewing Angle	89/89/89/89
Brightness	1000cd/m2, LED Backlight Enhanced
Contrast	1200:1, Dynamic contrast ratio: 6000:1
Dimming	Auto-dimming by Light Sensor
Response Time	9 ms typical

Remote control

Operate Voltage

Touch

Power Consumption

Standby mode

Weight

Enclosure

Support for full OSD features

AC 100 ~ 240V 60/50Hz

10 Points P-CAP Touch

140 Watt

3W or less

45KG approx

IP54 type

Environmental

Operating Temperature -10-45°C,

Operating Humidity 10%–85%

Storage Temperature -30–60°C

Storage Humidity 5%–90%



Data Sheet



Wall-mounted (42")



Also available in White