


## Data Sheet

### Single-Sided Freestanding Totem (47") KRP-AS-47ex-SSTM

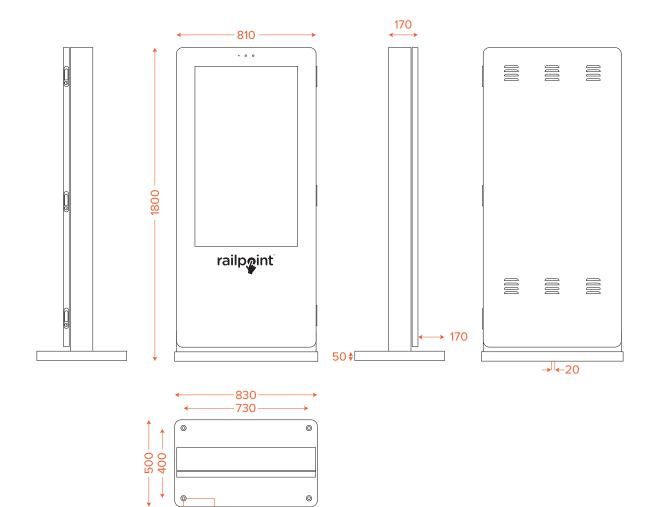

LCD panel: active matrix TFT LCD Display Glass: anti-reflective / anti-glare coated Internal media player housing Internal power output for power feed to media player Built-in option to add external WiFi aerial antenna Remote control support for full OSD features Front opening for maintenance. Three Year parts warranty

ø16

ø30

Active Area: 584.82 x 1039.68mm, 47" diagonal

Resolution: 1080 x 1920px Pixel Pitch: 0.5415 x 0.5415mm Color: 10 bits 1.06 billon colour Interface: VGA, HDMI Viewing Angle: 89/89/89/89°

Brightness: 1500cd/m<sup>2</sup> Contrast: 1300:1

Dynamic contrast ratio: 8000:1

Response time: 15m/sec / 5ms typical Voltage AC 100  $^{\circ}$  240V 60/50Hz Power consumption (on): 860 Watt Power compumption (standby): 8W or less

Weight: 185 KG approx Enclosure: IP65 type Touch: infrared

Environmental Operating temperature -10 to

+40°C


Operating humidity: 10% to 80% Storage Temperature: -30 to 50°C Storage Humidity: 5% to 90%





# Data Sheet

### Double-Sided Freestanding Totem (47") KRP-AS-47ex-DSTM

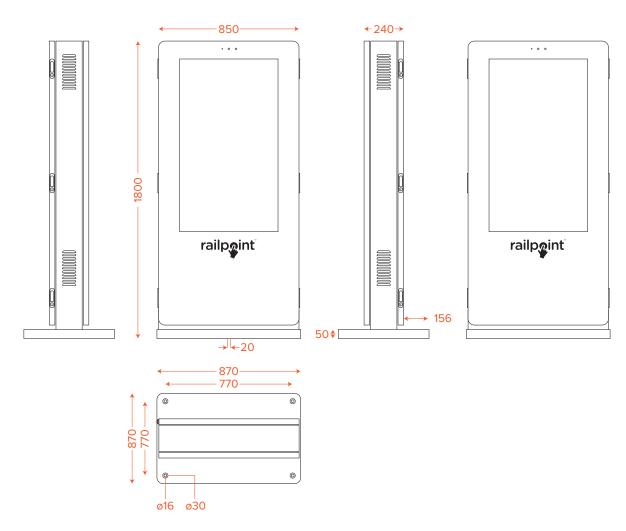

LCD panel: active matrix TFT LCD Display
Glass: anti-reflective / anti-glare coated
Internal media player housing
Internal power output for power feed to media player
Built-in option to add external WiFi aerial antenna
Remote control support for full OSD features

Front opening for maintenance. Three Year parts warranty

Active Area: 584.82 x 1039.68mm, 47" diagonal

Resolution: 1080 x 1920px Pixel Pitch: 0.5415 x 0.5415mm Color: 10 bits 1.06 billon colour

Interface: VGA, HDMI Viewing Angle: 89/89/89/89° Brightness: 1500cd/m² Contrast: 1300:1

Dynamic contrast ratio: 8000:1 Response time: 15m/sec / 5ms typical Voltage: AC 100 ~ 240V 60/50Hz Power consumption (on): 860W

Power compumption (standby): 8W or less

Weight: 185 KG approx Enclosure: IP65 type Touch: infrared Touch

Environmental operating temperature:

-10 to + 40°C

Operating humidity: 10% to 80% Storage temperature: -30 to +50°C Storage humidity: 5% to 90%

